



Lifejacket Lights

Daniamant design and manufacture all of our products in line with the relevant worldwide approvals, technical specifications, current legislation and International directives.

Our mission is to achieve World class performance through partnerships with our suppliers, customers and employees, providing products and services that enhance the safety and security of our customers.

Daniamant products cover 11 key areas:

- Lifejacket Lights
- Liferaft Lights
- Lifebuoy Lights
- Intrinsically Safe Lights
 - Special Lights
 - LED Flares
- Bridge Navigational Watch Alarm System (BNWAS)
 - Salinometers
 - Oil Level Alarm
- Electronic Inclinator
- Agency for a range of world-renowned safety product brands (supplied to the Danish market)

Further Information

For further information on our products, please see our website: www.daniamant.com

Daniamant Ltd

Unit 3, The Admiral Park
Airport Service Road
Portsmouth, PO3 5RQ
United Kingdom

Tel +44 23 92 67 51 00
Fax +44 23 92 67 51 01
sales@daniamant.com

Daniamant 
Be safe at sea

Dan M2

The light is a single compact flashing unit. It is manually activated by rotation of the light dome. Easily fitted with two different backing plates, one to go over a thin strap and one to go over a 5cm belt.



Dan MR2

MR2 is the recessed version of the Dan M2. This light has a special fitting clip, designed for attachment to a lifejacket so that only the dome is above the fabric on the jacket. The light is specially designed for lifejackets used on passenger vessels with evacuation or chute systems for mass evacuation of passengers.



Dan W2

This is the automatic version of Dan M2. The light activates automatically when in water and can be turned off manually if required. The light has the same attachment arrangement as the Dan M2.



Dan WR2

WR2 is the recessed version of the Dan W2. This light has a special fitting clip, designed for attachment to a lifejacket so that only the dome is above the fabric on the jacket. The light is specially designed for lifejackets used on passenger vessels with evacuation or chute systems for mass evacuation of passengers.



0038/YYYY



Daniamant ApS
 Industrivej 24C
 3550 Slangerup
 Denmark

Tel +45 47 37 38 00
 Fax +45 47 37 38 09
 orders@daniamant.com

Daniamant Ltd
 Unit 3, The Admiral Park
 Airport Service Road
 Portsmouth, PO3 5RQ
 United Kingdom

Tel +44 23 92 67 51 00
 Fax +44 23 92 67 51 01
 sales@daniamant.com

Daniamant Electronics A/S
 Industrivej 24C
 3550 Slangerup
 Denmark

Tel +45 47 37 38 00
 Fax +45 47 37 38 09
 info@daniamant.com

L7A2

The unique L7A2 now replaces the well-established L7A. The design is similar, however the L7A2 is around half the length of the earlier light. The L7A2 can be supplied with a new, shorter receptacle for permanent mounting into the foam material of the inherently buoyant lifejacket, or it can be retrofitted into the existing L7A receptacle.



L6

The L6 is a small, compact and robust flashing Lifejacket light fully meeting the latest stringent IMO SOLAS requirements. The L6 is a manually activated, one piece light. It is operated by a simple pull ring that is easy to use even with gloved hands or in adverse conditions.



L6A

The L6A is very similar to the manual L6, but it is an automatically activated light. It uses a lead to ensure the light comes on in the water and that lead allows the light to be switched off if required.



The L6, L6A and L7A2 all utilise the latest electronic circuitry that ensures the light flashes at between 50 -70 times per minute. The L6 and the L6A are both supplied with a unique mounting clip to assist easy fixing to a wide range of lifejackets.

Please note that intrinsically safe versions of the L6 and L6A are now available. These new Lights are known as L6-Ex and L6A-Ex and full details can be found in the intrinsically safe section of our web site



TECHNICAL DATA SHEET

Lifejacket Lights

M3, MR3, ML3, W3, WR3 & WL3

Daniamant design and manufacture all of our products in line with the relevant worldwide approvals, technical specifications, current legislation and International directives.

Our mission is to achieve World class performance through partnerships with our suppliers, customers and employees, providing products and services that enhance the safety and security of our customers.

Daniamant products cover 11 key areas:

- Lifejacket Lights
- Liferaft Lights
- Lifebuoy Lights
- Intrinsically Safe Lights
 - Special Lights
 - LED Flares
- Bridge Navigational Watch Alarm System (BNWAS)
 - Salinometers
 - Oil Level Alarm
 - Electronic Inclinometer
- Agency for a range of world-renowned safety product brands (supplied to the Danish market)

Further Information

For further information on our products, please see our website: www.daniamant.com

MODEL	M3	MR3	ML3	W3	WR3	WL3
Part number	1130	1230	1241	1330	1430	1441
Plastic Colour	Blue (Standard) others available					
Light - Output	Minimum 0.75 cd					
Light - Duration	Minimum 8 hours					
Light - Type	White Flashing LED					
Material	ABS Polycarbonate / TPE					
Storage Temperature	-30°C to + 65°C					
Operating Temperature	-1°C to + 30°C					
Storage Life	5 years					
Weight - Nominal	31,3 g	24,6 g	24,6 g	31,3 g	24,6 g	24,6 g
Battery Type	Lithium Thionyl Chloride					
Activation	Manual			Water/Manual		
Approvals - Classification Societies	SOLAS / MED / USCG					
Approvals - Country	See our web site for full list of Country approvals					

Transport Specification

Transport Regulations are subject to change. Please refer to the latest Product safety Data Sheet at www.daniamant.com for details.

Packing Specification

To minimize shipping costs, all Lifejacket Lights are packed and supplied in boxes of 250 and 500 off.

The dimensions are:

Box of 250 off: 40 x 20 x 40 cm

Box of 500 off: 40 x 40 x 40 cm

Approximate packed weights are:

Box of 250 off: 10 kg, including Clips 1

Box of 500 off: 20 kg, including Clips 1

Daniamant ApS

Industrivej 24C
3550 Slangerup
Denmark

Tel +45 47 37 38 00
Fax +45 47 37 38 09
orders@daniamant.com

Daniamant Ltd













Unit 3, The Admiral Park
Airport Service Road
Portsmouth, PO3 5RQ
United Kingdom

Tel +44 23 92 67 51 00
Fax +44 23 92 67 51 01
sales@daniamant.com

Daniamant Electronics A/S

Industrivej 24C
3550 Slangerup
Denmark

Tel +45 47 37 38 00
Fax +45 47 37 38 09
info@daniamant.com

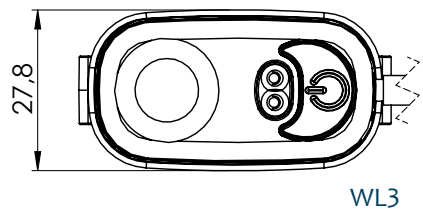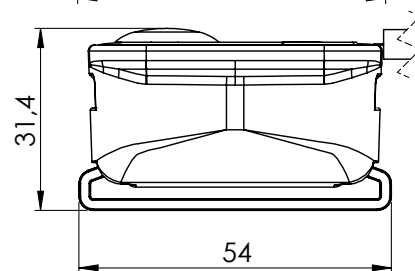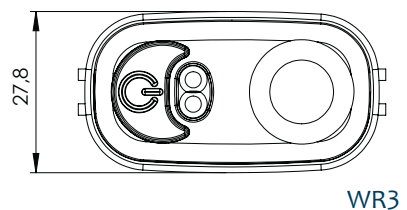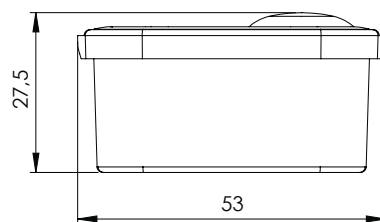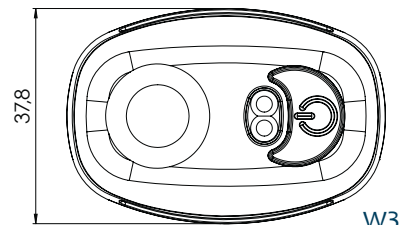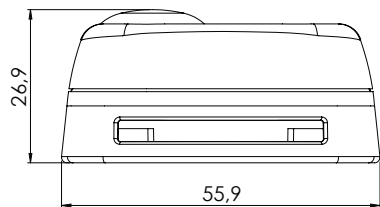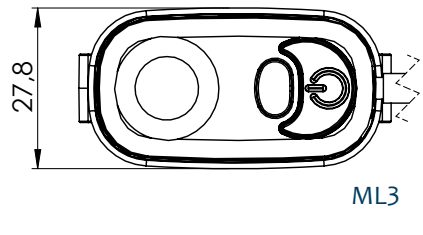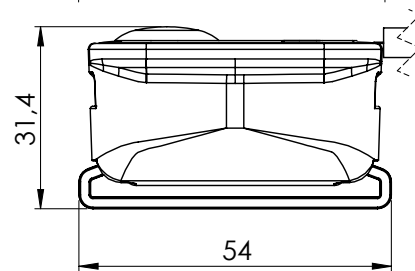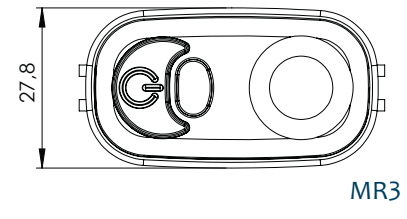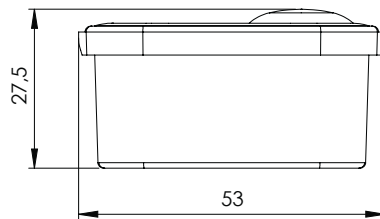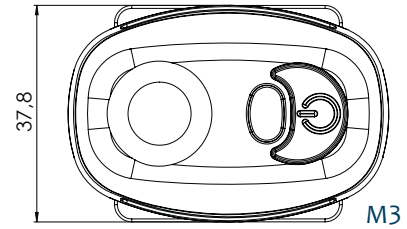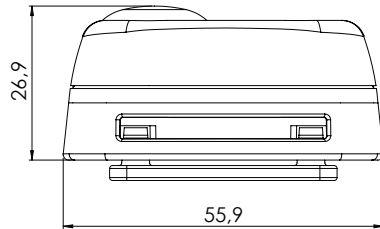



TECHNICAL DATA SHEET

Lifejacket Lights M4-A / W4-A

Daniamant design and manufacture all of our products in line with the relevant worldwide approvals, technical specifications, current legislation and International directives.

Our mission is to achieve World class performance through partnerships with our suppliers, customers and employees, providing products and services that enhance the safety and security of our customers.

Daniamant products cover 11 key areas:

- Lifejacket Lights
- Liferaft Lights
- Lifebuoy Lights
- Intrinsically Safe Lights
 - Special Lights
 - LED Flares
- Bridge Navigational Watch Alarm System (BNWAS)
 - Salinometers
 - Oil Level Alarm
 - Electronic Inclinator
- Agency for a range of world-renowned safety product brands (supplied to the Danish market)

Further Information

For further information on our products, please see our website: www.daniamant.com

MODEL	M4-A	W4-A
Part number	1140	1360
Plastic Colour	Orange	
Light - Output	Minimum 0.75 cd	
Light - Duration	Minimum 8 hours	
Light - Type	White Flashing LED	
Material	ABS & Polycarb	
Storage Temperature	-30 C to +65 C	
Operating Temperature	-1 C to +30 C	
Storage Life	5 years	
Weight - Nominal	42 g	42 g
Battery Type	Alkaline	
Activation	Manual	Water/Manual
Approvals	SOLAS/MED/USCG	
- Classification Societies		
Approvals - Country	See our website for full list of Country approvals	

Transport Specification

Transport Regulations are subject to change. Please refer to the latest Product safety Data Sheet at www.daniamant.com for details.

Accessories

- Recessed Clip:** Part number: 1971
Belt Clip: Part number: 1961

Packing Specification

To minimize shipping costs, all Lifejacket Lights are packed and supplied in boxes of 250 and 500 off.

The dimensions are:

- Box of 250 off : 40 x 40 x 24 cm
- Box of 500 off : 78 x 40 x 24 cm

Approximate packed weights are:

- Box of 250 off : 14 kg
- Box of 500 off : 23 kg

Daniamant ApS
 Industrivej 24C
 3550 Slangerup
 Denmark

Tel +45 47 37 38 00
 Fax +45 47 37 38 09
 orders@daniamant.com





Daniamant Ltd
 Unit 3, The Admiral Park
 Airport Service Road
 Portsmouth, PO3 5RQ
 United Kingdom

Tel +44 23 92 67 51 00
 Fax +44 23 92 67 51 01
 sales@daniamant.com

Daniamant Electronics A/S
 Industrivej 24C
 3550 Slangerup
 Denmark

Tel +45 47 37 38 00
 Fax +45 47 37 38 09
 info@daniamant.com

Outline

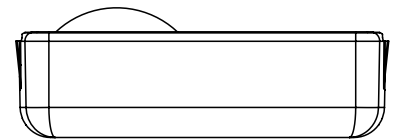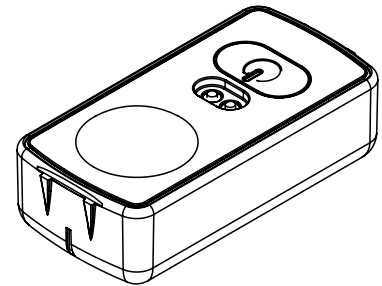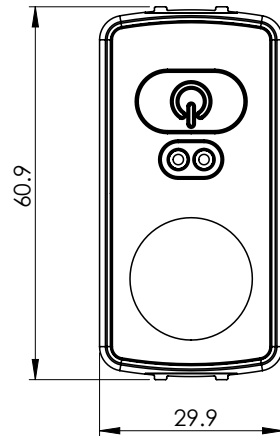



TECHNICAL DATA SHEET

Intrinsically Safe Lifejacket Lights L6-Ex and L6A-Ex

Daniamant design and manufacture all of our products in line with the relevant worldwide approvals, technical specifications, current legislation and International directives.

Our mission is to achieve World class performance through partnerships with our suppliers, customers and employees, providing products and services that enhance the safety and security of our customers.

Daniamant products cover 11 key areas:

- Lifejacket Lights
- Liferaft Lights
- Lifebuoy Lights
- Intrinsically Safe Lights
 - Special Lights
 - LED Flares
- Bridge Navigational Watch Alarm System (BNWAS)
 - Salinometers
 - Oil Level Alarm
 - Electronic Inclinator
- Agency for a range of world-renowned safety product brands (supplied to the Danish market)

Further Information

For further information on our products, please see our website: www.daniamant.com

MODEL	L6-Ex	L6A-Ex
Part number	79-310A	79-350A
Colour	Yellow	
Light – Output	Minimum 0.75 cd	
Light – Duration	Minimum 8 hours	
Light – Type	Flashing	
Material	Polycarbonate	
Storage Temperature	-30° C to + 65° C	
Operating Temperature	-1° C to + 30° C	
Storage Life	5 years	
Weight – Nominal	59 g	66 g
Battery Type	Lithium Manganese Dioxide	
Activation	Manual	Water
Ex number	Ex ia IIC T3 Gb	
Ex Temperature range	-35° C < Ta < +65° C	
Use in Zones	1 & 2	
ATEX category	2G (Intrinsic safety)	
Temperature Class	T3 (Max surface Temp 200° C)	
Approvals – Classification Societies	SOLAS/MED/USCG/ATEX/IECEX	
Approvals – Country	See our web site for full list of Country approvals	

Transport Specification

Transport Regulations are subject to change. Please refer to the latest Product safety Data Sheet at www.daniamant.com for details.

Packing Specification

To minimize shipping costs, both Lifejacket Lights are packed and supplied in boxes of 50 off.

The dimensions are:

Box of 50 off: 45 x 35 x 15 cm

Approximate packed weights are:

L6-Ex: 50 off at 4,5 kg

L6A-Ex: 50 off at 5,0 kg

Daniamant Ltd
 Unit 3, The Admiral Park
 Airport Service Road
 Portsmouth, PO3 5RQ
 United Kingdom



Tel +44 23 92 67 51 00
 Fax +44 23 92 67 51 01
 sales@daniamant.com

Daniamant ApS
 Industrivej 24C
 3550 Slangerup
 Denmark


Tel +45 47 37 38 00
 Fax +45 47 37 38 09
 orders@daniamant.com

Daniamant Electronics A/S
 Industrivej 24C
 3550 Slangerup
 Denmark

Tel +45 47 37 38 00
 Fax +45 47 37 38 09
 info@daniamant.com

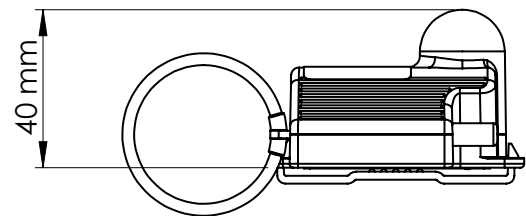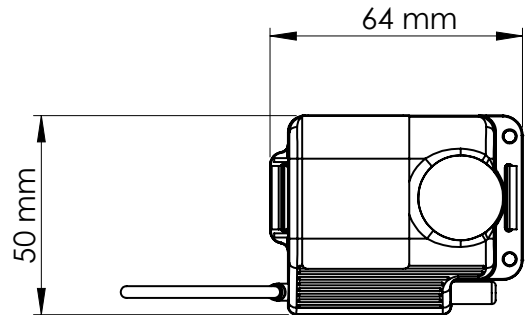

L6-Ex

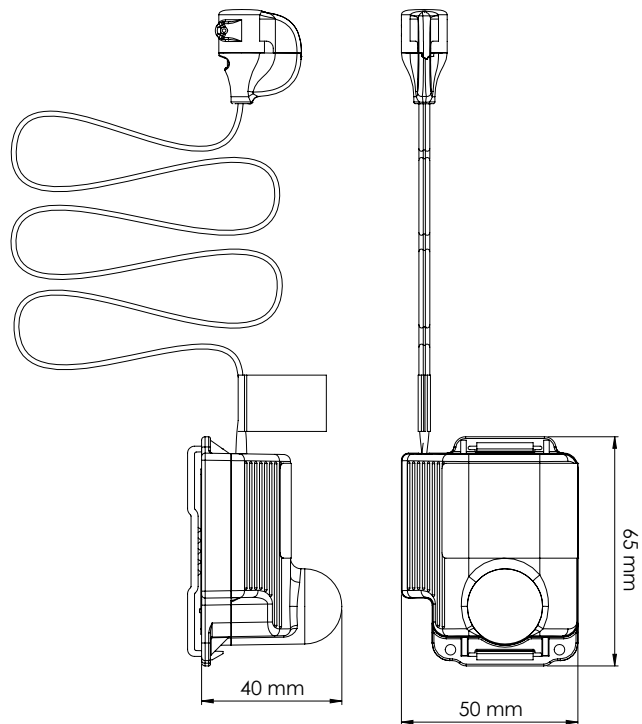

L6A-Ex